




Sprout channel cubby battery Replacement

a guide for replacing the battery.

Written By: jasen biggins

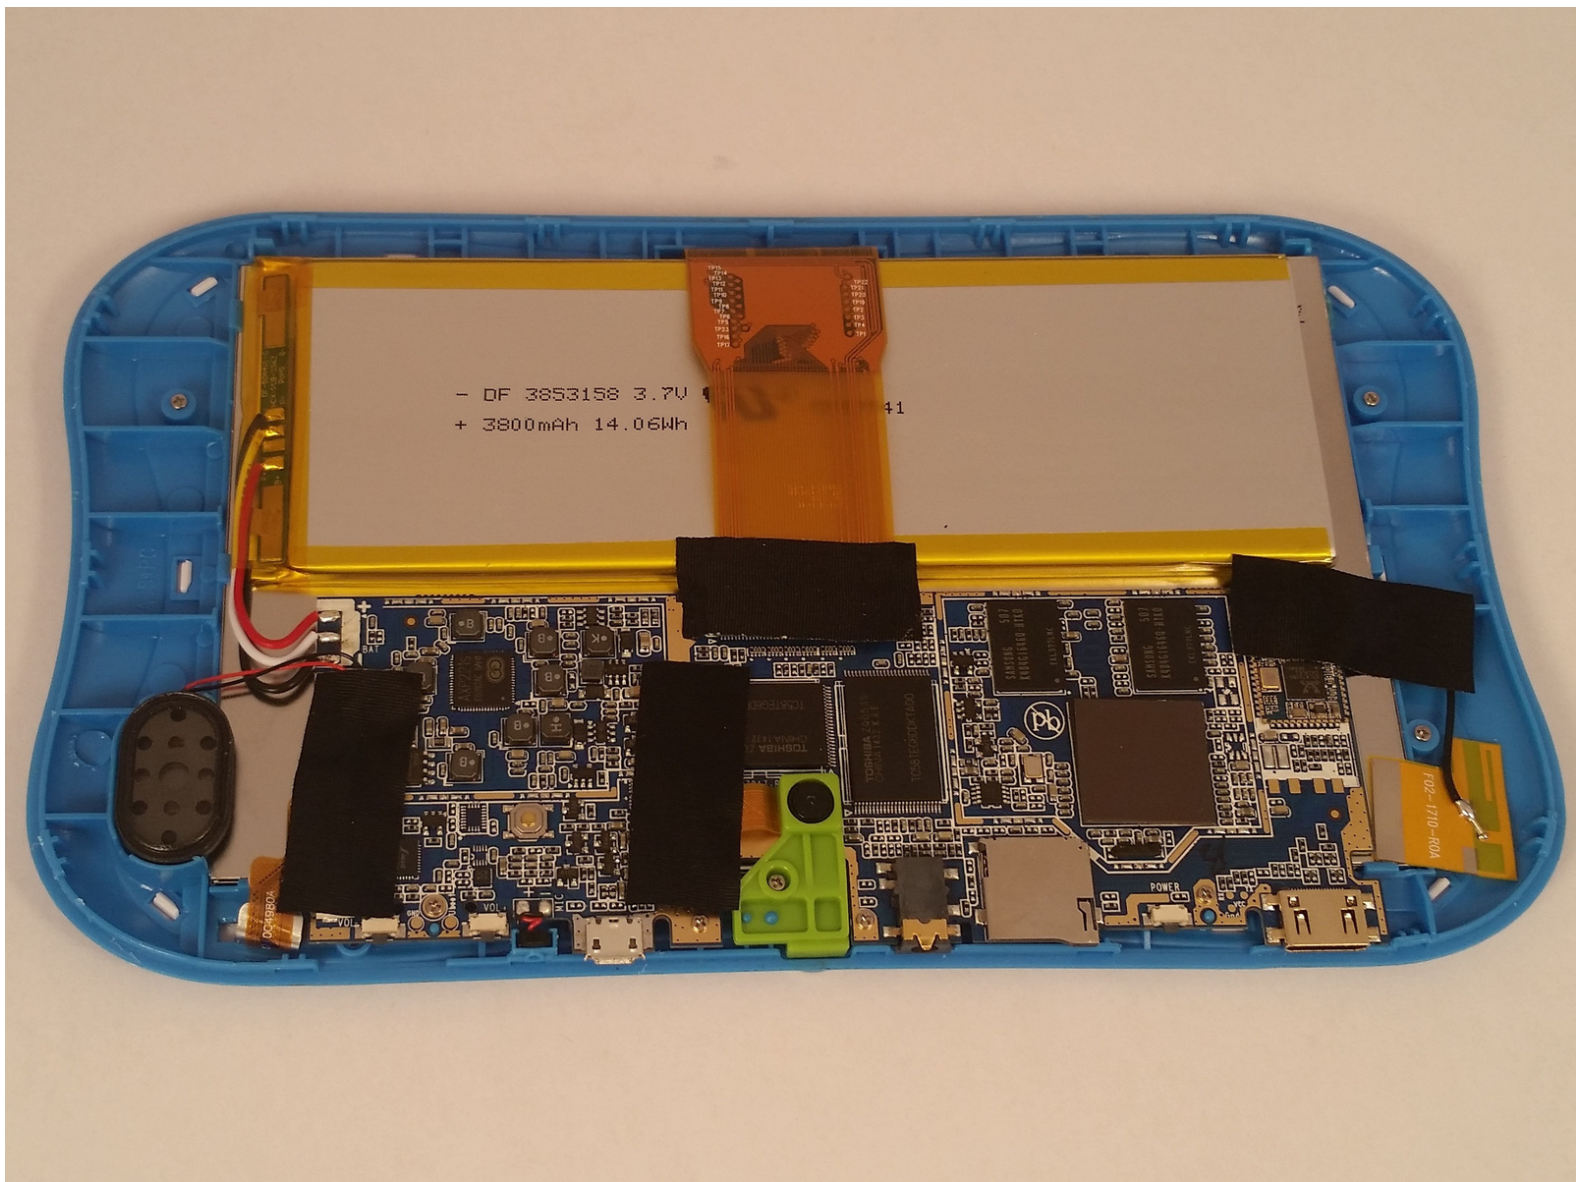

INTRODUCTION


The battery is fairly easy to replace the only issue with taking it out is the adhesive holding it in. the best way to do this is to heat it up, recommended tool is the iopener and the mettle spudger.



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
 - [iOpener](#) (1)
 - [Soldering Station](#) (1)
-



Step 1 — Dissassemble the device

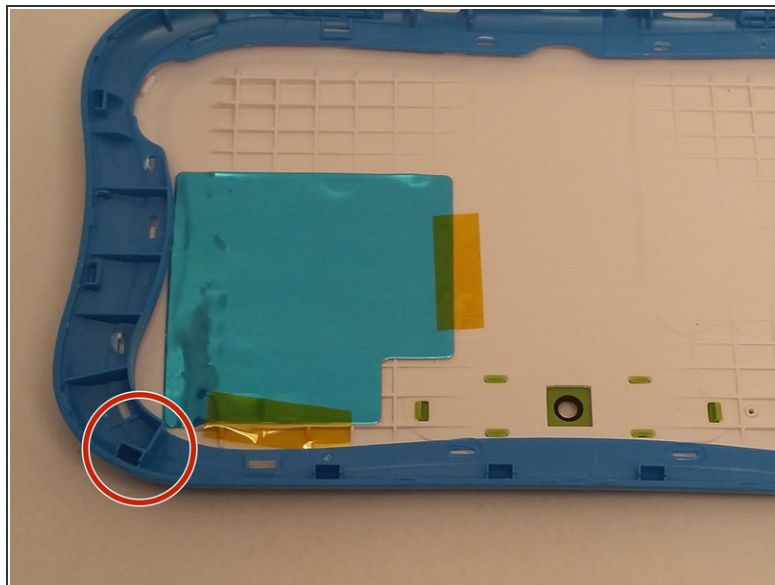

- Use an opening tool to push in and release 16 small plastic clips around the edge of the case. As the clips are released, gradually pry the case apart.

ⓘ It is easiest to start on the corners.

Step 2 — battery

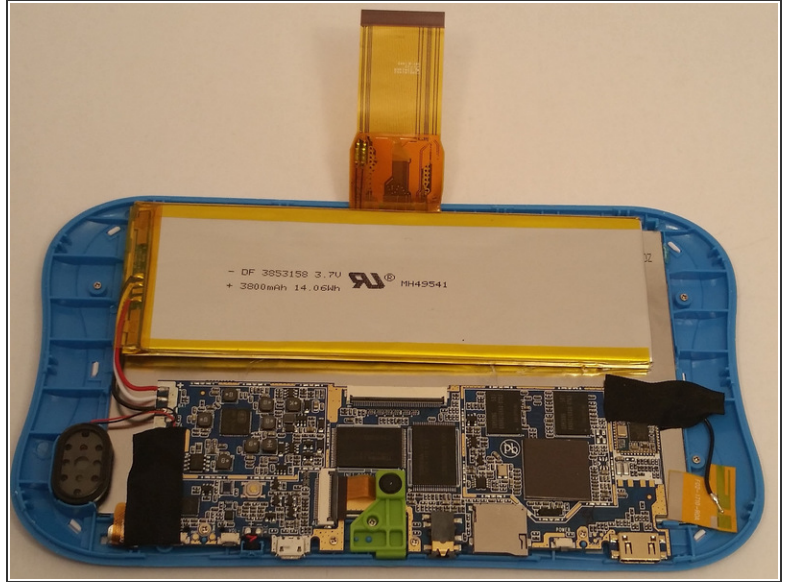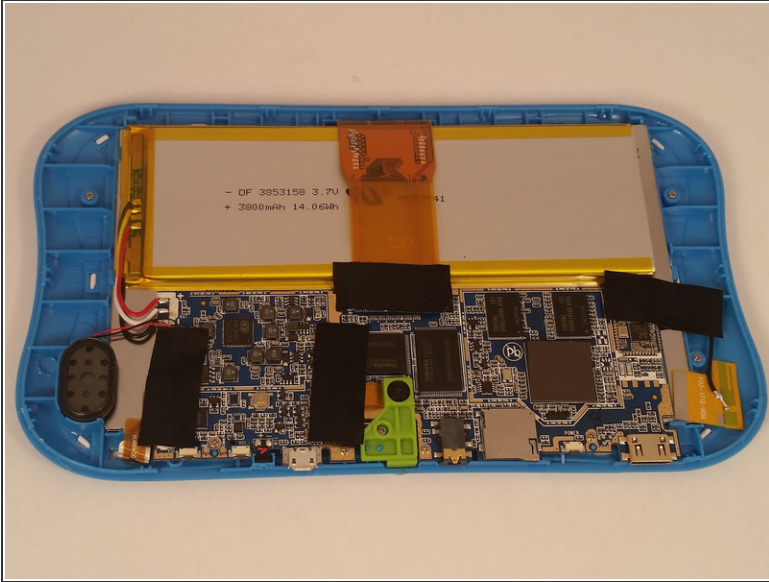


- Remove the black electrical tape over the ribbon connector.
- Remove the ribbon connector over the battery.
- Make sure to be careful of the ribbon connector while working on the device

Step 3





- Next you must heat up the battery to help weaken the adhesive connecting the battery to the device.

Step 4

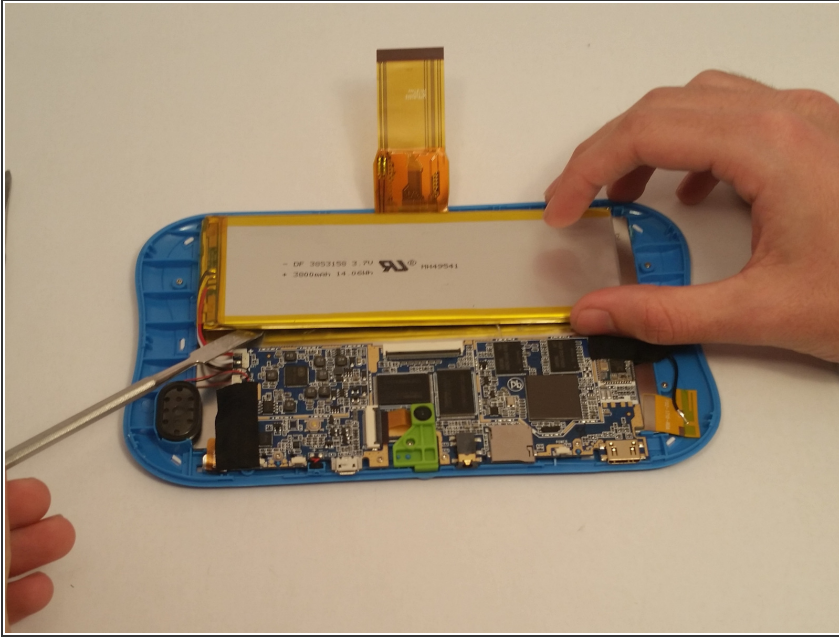

⚠ Once this is done start to pry the battery away from the device carefully. It helps to start at the corners and move inward.

Step 5

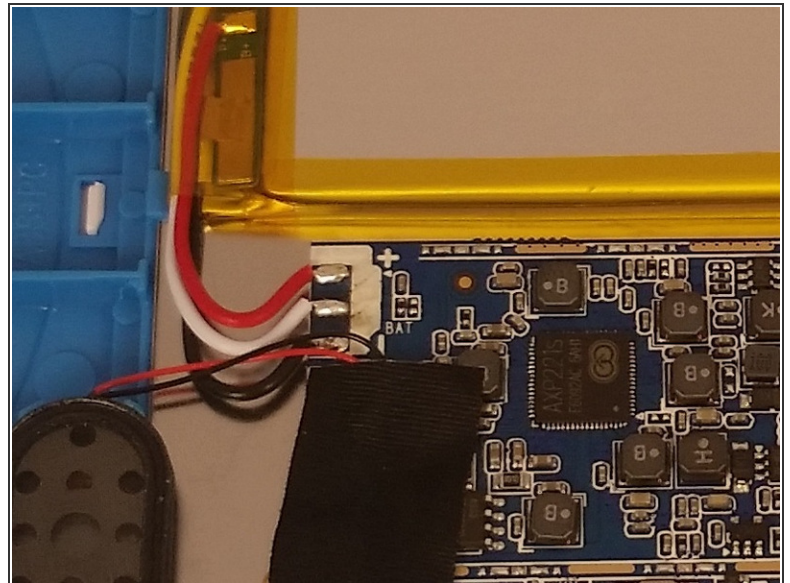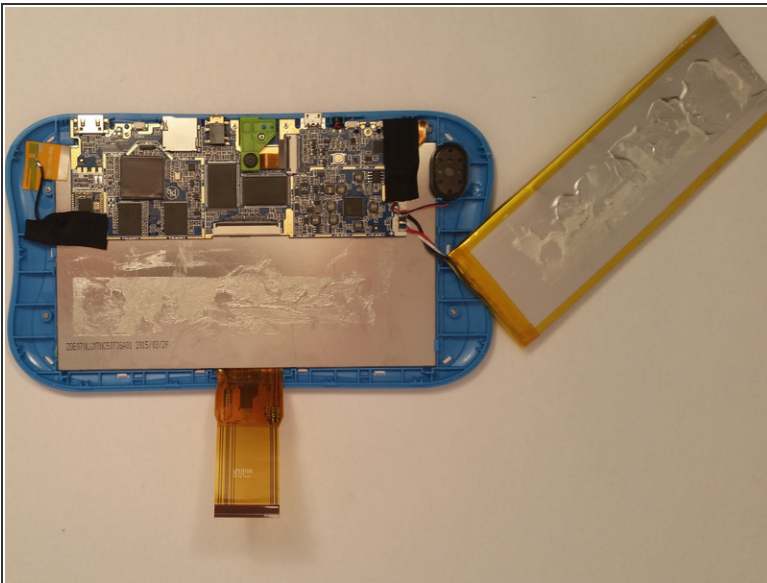

- Once you remove the battery from the device it is still connected by three wires a red black and white one it is important to remember the order they are in when reconnecting the new battery.
- The order from the battery up is red white black.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-10-07 06:33:57 PM.